

BERNARDO 367 side table

Design

Rodolfo Dordoni

Description

Side table for outdoor use

Structure

Powder coated steel.

Steel used by RODA is cleaned and treated with an electrolytic process of hard iron phosphatisation. This pre-painting guarantees a higher resistance to corrosion and it removes polluting substances. Its effect is reinforced with a following nanotechnology anticorrosive treatment.

Top

Powder coated steel or HPL grey.

High pressure laminate (HPL) extremely resistant to wear, impact, scratch, moisture, heat and stain; it has good hygienic and anti-static properties. Its characteristic "black heart" is made of layers of fibrous cellulosic material soaked with thermosetting resins and glued by an high-pressure process until obtaining a homogeneous material non-porous.


Base

Simplon white stone.

Grey granite stone, brushed with a natural effect.

Technical data

Weight: 15 kg

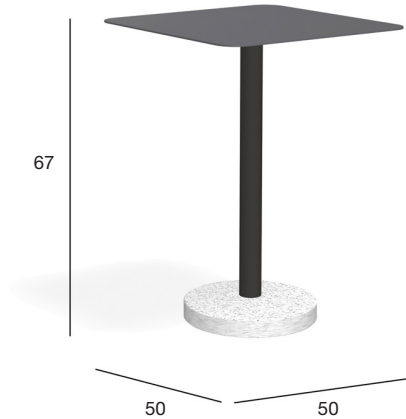

Finishes



BRD367-01-21



structure
metal\01 smoke
top
21 hpl grey
base
Simplon white

BRD367-02-21



structure
metal\02 milk
top
21 hpl grey
base
Simplon white

BRD367-01-01



structure
metal\01 smoke
top
metal 01 smoke
base
Simplon white

BRD367-02-02



structure
metal\02 milk
top
metal 02 milk
base
Simplon white

Maintenance

Steel

In case of exposition to weather conditions, it is recommended to wash regularly the product with mild tepid water. In case cleaning is needed, use a neutral soap (UNIVERSAL CLEANER RODA) and warm or mild water. Dry immediately to avoid stains and halos caused by water.

Eventual rusty formation must be treated with a rust stopper and eventually touched up with the paint stick in the same color of structure, supplied by RODA.

HPL

Use a water-soaked cloth and in case of persistent spots, use a neutral soap UNIVERSAL CLEANER. Dry carefully. Do not use abrasive products, acid substances, chemical aggressive solvents.

Stone

All stones are protected by an anti-spot treatment, but it is recommended to clean with care the surface to maintain their original aspect in the course of time. In case of spots, it is necessary to clean them immediately with natural soap and absorbent cloth in order not to remove the protection treatment.

For a normal cleaning, use a soaked cloth with distilled water. Only in case of obstinate spots, use few drops of ammonia diluted with water. In any case, try it in a hidden part to verify its efficiency and its no-damaging effect. Do not use abrasive products, acid substances, chemical aggressive solvents.

Similar products



ROOT 067 side table



STORK 001 side table