

## Design

Gordon Guillaumier

## Description

Bar trolley for outdoor use

## Structure

Teak frame. Teak wood contains a natural oily resin which makes it extremely resistant to weather, temperature, parasite attacks and insects. The exposure outdoor creates a 1/2 mm-thick oxidation patina on the wood surface which favors its discoloration to a silver-grey color; this change does not affect its original characteristics in any way. The grey patina can be avoided or removed with the correct maintenance.

## Top

AISI 316 stainless steel.


Stainless steel owes its excellent resistance to corrosion to its ability to passivate, that means to oxidize without rusting.

## Weight

6 kg

## Storage cover

Available

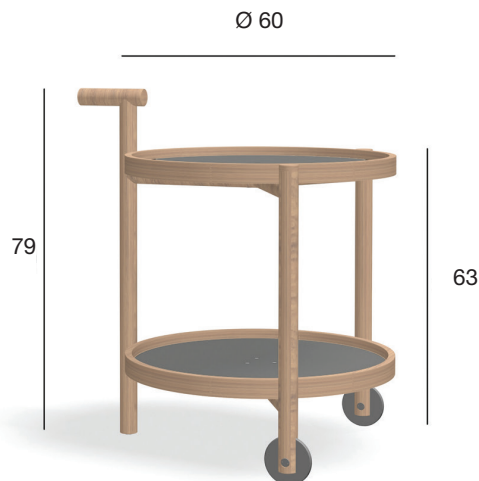

## Finishes



CDY001-01



## structure

teak\01

## Maintenance

### Teak

- In humid conditions, teak may release some reddish oil, which can cause stains on the surface. For normal cleaning, use a soft cloth (not in microfiber), fresh water and SUNDECK SOAP.
- use SUNDECK WOOD OIL LIGHT, a nutrient and protective oil, on the new product to avoid the superficial oxidation.
- use GREY OFF every 2/3 years to remove the grey patina due to the oxidation of the surface. After the treatment with GREY OFF, wash the furniture with water and SUNDECK SOAP and oil it with SUNDECK WOOD OIL LIGHT.
- In case of deep spots hard to clean with SUNDECK SOAP, it is recommended to sand the surface uniformly before using GREY-OFF; in any case, do not use GREY-OFF more than once a year.
- Always avoid abrasive products or aggressive chemical solvents.

### Stainless steel

- In case of exposition to weather conditions, especially in corrosive environments, (for instance near the sea), to avoid rust formation, it is recommended to wash regularly the product with mild fresh water. If the product needs a thorough cleaning, use a neutral soap (UNIVERSAL CLEANER RODA) and warm or mild water. Dry immediately to avoid stains and halos caused by water.
- Brush following the direction of polish (if the product is not painted) and use a microfiber cloth to obtain a better result. To remove eventual print on the surface, use a glass cleanser or ammonia, rinse out accurately and dry with a cloth. In case of persistent spots or scratches, use a specific detergent polishing product for stainless steel. Before using it on the product, try it in a hidden part to verify its efficiency and its no-damaging effect. Do not use metallic brushes, abrasive products, acid substances, bleach or chemical aggressive solvents.