

Chalice

EDWARD VAN VLIET



The Chalice Lamp captures the essential grace of glass. Blossoms of tulip-like flowers define the lamp, diffusing light naturally and reflecting the floral pattern enclosed within each chalice.

Detailing



Thanks to the dimmable LED lamps hidden behind the chalices, light is diffused in a natural way and projected by the copper-plated signature flowers.

Colours


Chrome

Metallic Grey

Chalice / 24

Dimensions

48cm | 18.9"



48cm | 18.9"

Product

WIDTH 48cm | 18.9"
HEIGHT 48cm | 18.9"
DEPTH 48cm | 18.9"
DIAMETER 48cm | 18.9"
WEIGHT NETTO 7kg | 15.43lbs

Packaging

WIDTH 39.3cm | 15.5"
HEIGHT 46.8cm | 18.4"
CUBAGE 0.16m³ | 5.52ft³
LENGTH 85cm | 33.5"
WEIGHT 20kg | 44.09lbs

Technical CE

MATERIAL

Chromed or powder coated metal sphere, bakelite and glass chalices.

ENERGY LABEL

Energy Label B

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

24

INPUT VOLTAGE

230

FREQUENCY

50/60

MAX POWER CONSUMPTION

16W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

CANOPY

Brushed steel pebble

COLOUR TEMPERATURE

2700 K

CRI

85

LIGHT OUTPUT

450 lm

Technical cULus

MATERIAL

Chromed or powder coated metal sphere, bakelite and glass chalices.

ENERGY LABEL

Energy Label B

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

120

MAX POWER CONSUMPTION

16W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Brushed steel pebble

CRI

85

INSTALLATION REQUIRED

Yes

NUMBER OF LIGHTSOURCES

24

FREQUENCY

50/60

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

COLOUR TEMPERATURE


2700 K

LIGHT OUTPUT

450 lm

Chalice / 48

Dimensions

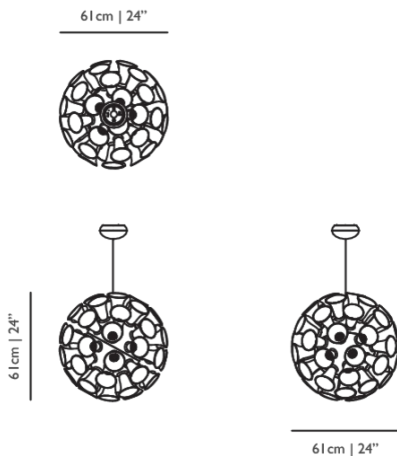

Product

WIDTH 61cm | 24"
HEIGHT 61cm | 24"
DEPTH 61cm | 24"
DIAMETER 61cm | 24"
WEIGHT NETTO 7kg | 15.43lbs

Packaging

WIDTH 46.8cm | 18.4"
HEIGHT 57.8cm | 22.8"
CUBAGE 0.34m³ | 12.18ft³
LENGTH 127.5cm | 50.2"
WEIGHT 30kg | 66.14lbs

Technical CE

MATERIAL

Chromed or powder coated metal sphere, bakelite and glass chalices.

ENERGY LABEL

Energy Label B

LIGHTSOURCE INCLUDED

Yes

INSTALLATION REQUIRED

Yes

NUMBER OF LIGHTSOURCES

48

INPUT VOLTAGE	230	FREQUENCY	50/60
MAX POWER CONSUMPTION	32W	DIMMABLE	Yes
LAMPHOLDER	LED (Solid state)	LIFETIME	50000 hours
CABLE COLOUR	Transparent with tinned cores	CABLE LENGTH	400cm 157.5"; 1000cm 393.7"
CANOPY	Brushed steel pebble	COLOUR TEMPERATURE	2700 K
CRI	85	LIGHT OUTPUT	900 lm

Technical cULus

MATERIAL

Chromed or powder coated metal sphere, bakelite and glass chalices.

ENERGY LABEL	Energy Label B	INSTALLATION REQUIRED	Yes
LIGHTSOURCE INCLUDED	Yes	NUMBER OF LIGHTSOURCES	48
INPUT VOLTAGE	120	FREQUENCY	50/60
MAX POWER CONSUMPTION	32W	DIMMABLE	Yes
LAMPHOLDER	LED (Solid state)	LIFETIME	50000 hours
CABLE COLOUR	Transparent with tinned cores	CABLE LENGTH	400cm 157.5"; 1000cm 393.7"
CANOPY	Brushed steel pebble	COLOUR TEMPERATURE	2700 K
CRI	85	LIGHT OUTPUT	900 lm

Dimmer

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.

DIMMER TYPE

Mains dimmable (trailing edge / reverse phase)

LOAD TYPE

Capacitive load (C-Type)

