

# FLOS

## In Vitro Bollard 1 , 115.8" - 400mm Terracota 11W, 1230lm, 3000K, CRI 80 Integral 0-10V LED driver UL - Specification Sheet


by Philippe Starck, 2020

Mounting	Base on Ground
Lamp (Bulb) Description	LED 11W, 1230lm, 3000K, CRI 80
Canopy Dimension	714
Environment	Outdoor - Wet location
Dimming	0-10V
Finish	Terracota
Technical and Product Description	Lighting outdoor collection with diffuse light for exterior ground installation. Integral opalescent diffuser and external protection in transparent borosilicate glass. The structure is made of die-cast and extruded aluminum treated with a chemical conversion process for effective resistance to atmospheric agents.


The body is powder coated and comes in various finishes. Integrated LED light source with Edge Lighting optical technology to guarantee perfect uniform lighting. Integrated 120V ON/OFF or dimmable electrical power supply.

The unit comes with a watertight plug for connection to the electrical network. The device may be installed on any flooring with anchors. Box for installation on flooring laid over concrete to be order separately



 F018A31BU25 Terracota

### Dimensional Image




IN VITRO BOLLARD  
15.7" / 400MM

### Electrical

Voltage	120-277
IP Rating	IP65

### Physical

Supply	LED driver
Construction Material	Aluminum, Glass
Weight	2.2 lbs

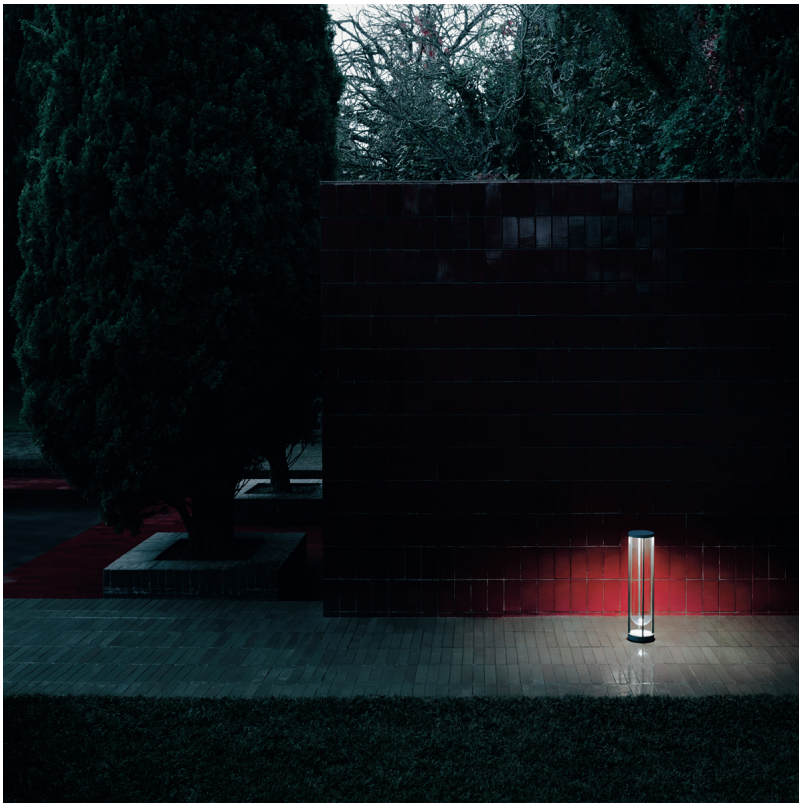

### Certifications

