



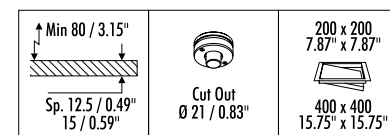

Compasso d'Oro ADI
Award 2014



19160003	STANDARD DIM DALI - PUSH - 1-10 V VERSION	MAX 1050 mA DC - 12 W LED - 3000K - 1170 lm VISIBLE HOLE Ø 18 mm - COMPULSORY INSTALLATION KIT NOT INCLUDED INCLUDES LED DRIVER INPUT 100-240 V - 50/60 Hz - DALI - PUSH - 1-10 V DIMMABLE

COMPULSORY INSTALLATION KITS

16530403	MATT BLACK	PLASTERBOARD FLANGE 12,5/15 mm
17430403	MATT BLACK - IP65	PLASTERBOARD CUT-OUT Ø 21 mm
		MINIMUM SPACE FOR MOUNTING 75 mm

OPTIONAL INSTALLATION KITS

16420003	STANDARD 200 x 200 mm	PLASTERBOARD PANEL 12,5 mm
16690003	STANDARD 400 x 400 mm	PLASTERBOARD CUT-OUT 200 x 200 mm / 400 x 400 mm



