

Prop Light Suspended

BERTJAN POT



"We have round lights, we have straight lights. We have them with lights on one side, we have them with lights on two sides. You can hang them high, low, horizontally, vertically or even hang them in an angle. Put them on the floor, hang them on your wall or down from the ceiling. We find it very hard to imagine an interior where this prop is not in place" - Bertjan Pot

Detailing



A theatrical, extravagant look that is suitable for spaces with both low and high ceilings.

Colours

2000K

Warm White


2700K

Soft White


Prop Light Suspended / Double

Dimensions

98cm | 38.6"



18cm | 7.1"



17cm | 6.7"

Product

WIDTH 98cm | 38.6"

HEIGHT 18cm | 7.1"

DEPTH 18cm | 7.1"

WEIGHT NETTO 6kg | 13.23lbs

Packaging

WIDTH 30cm | 11.8"

HEIGHT 30cm | 11.8"

CUBAGE 0.12m³ | 4.23ft³

LENGTH 133cm | 52.4"

WEIGHT 10kg | 22.05lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1600 lm

Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80


LIGHT OUTPUT

1600 lm


Prop Light Suspended / Double Horizontal

Dimensions

98cm | 38.6"



17cm | 6.7"



18cm | 7.1"

Product

WIDTH 98cm | 38.6"

HEIGHT 18cm | 7.1"

DEPTH 17cm | 6.7"

WEIGHT NETTO 6kg | 13.23lbs

Packaging

WIDTH 30cm | 11.8"

HEIGHT 30cm | 11.8"

CUBAGE 0.12m³ | 4.23ft³

LENGTH 133cm | 52.4"

WEIGHT 10kg | 22.05lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

36

SHAPE

Linear

INPUT VOLTAGE

110-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

21W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"

CANOPY

Pebble II White, ABS

CRI

80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1600 lm

Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

36

SHAPE

Linear

INPUT VOLTAGE

110-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI


80

LIGHT OUTPUT

1600 lm

Prop Light Suspended / Double Vertical

Dimensions

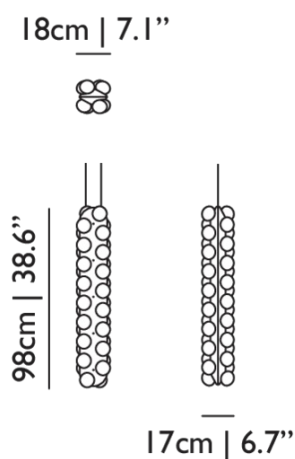

Product

WIDTH 17cm | 6.7"**HEIGHT** 98cm | 38.6"**DEPTH** 18cm | 7.1"**WEIGHT NETTO** 6kg | 13.23lbs

Packaging

WIDTH 30cm | 11.8"**HEIGHT** 30cm | 11.8"**CUBAGE** 0.12m³ | 4.23ft³**LENGTH** 133cm | 52.4"**WEIGHT** 10kg | 22.05lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL**INSTALLATION REQUIRED**

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

36

SHAPE

Linear

INPUT VOLTAGE

110-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"; 1000cm | 393.7"

CRI

80

LIGHT OUTPUT

1600 lm

*Technical cULus***ADDITIONAL**

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL**INSTALLATION REQUIRED**

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

36

SHAPE

Linear

INPUT VOLTAGE

110-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

21W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"

CANOPY

Pebble II White, ABS

CRI

80

LIGHT DIRECTION

All directions



LIGHT OUTPUT

1600 lm

Prop Light Suspended / Round Double

Dimensions

73cm | 28.7"



Product

WIDTH 73cm | 28.7"

HEIGHT 25cm | 9.8"

DEPTH 73cm | 28.7"

DIAMETER 73cm | 28.7"

WEIGHT NETTO 9kg | 19.84lbs

Packaging

WIDTH 88cm | 34.6"

HEIGHT 34cm | 13.4"

CUBAGE 0.27m³ | 9.4ft³

LENGTH 89cm | 35"

WEIGHT 15kg | 33.07lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

96

SHAPE

Disc

INPUT VOLTAGE

110-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

41W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"

CANOPY

Pebble II White, ABS

CRI

80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1936 lm

Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

96

SHAPE

Disc

INPUT VOLTAGE

110-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

41W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"

CANOPY

Pebble II White, ABS

CRI

80

LIGHT DIRECTION

All directions


LIGHT OUTPUT

1936 lm


Prop Light Suspended / Round Double Vertical

Dimensions

73cm | 28.7"



25cm | 9.8"



Product

WIDTH 0cm | 0"

HEIGHT 0cm | 0"

DEPTH 25cm | 9.8"

DIAMETER 0cm | 0"

WEIGHT NETTO 15kg | 33.07lbs

Packaging

WIDTH 88cm | 34.6"

HEIGHT 34cm | 13.4"

CUBAGE 0.27m³ | 9.4ft³

LENGTH 89cm | 35"

WEIGHT 15kg | 33.07lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

96

SHAPE

Disc

INPUT VOLTAGE

110-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

21W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"

CANOPY

Pebble II White, ABS

CRI

80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1936 lm

Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

96

SHAPE

Disc

INPUT VOLTAGE

110-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80



LIGHT OUTPUT

1936 lm

Prop Light Suspended / Round Single

Dimensions

73cm | 28.7"



19cm | 7.5"

Product

WIDTH 73cm | 28.7"**HEIGHT** 19cm | 7.5"**DEPTH** 73cm | 28.7"**DIAMETER** 73cm | 28.7"**WEIGHT NETTO** 7kg | 15.43lbs

Packaging

WIDTH 88cm | 34.6"**HEIGHT** 34cm | 13.4"**CUBAGE** 0.27m³ | 9.4ft³**LENGTH** 89cm | 35"**WEIGHT** 15kg | 33.07lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

48

INPUT VOLTAGE

110-240

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50/60

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

1078 lm

*Technical cULus***ADDITIONAL**

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

INSTALLATION REQUIRED

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

48

SHAPE

Disc

INPUT VOLTAGE

110-240

FREQUENCY

50/60

MAX POWER CONSUMPTION

21W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"

CANOPY

Pebble II White, ABS

CRI

80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1085 lm


Prop Light Suspended / Single

Dimensions

98cm | 38.6"



18cm | 7.1"



13cm | 5.1"

Product

WIDTH 98cm | 38.6"

HEIGHT 13cm | 5.1"

DEPTH 18cm | 7.1"

WEIGHT NETTO 5kg | 11.02lbs

Packaging

WIDTH 30cm | 11.8"

HEIGHT 30cm | 11.8"

CUBAGE 0.12m³ | 4.23ft³

LENGTH 133cm | 52.4"

WEIGHT 10kg | 22.05lbs

Technical CE

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

18

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

499 lm

Technical cULus

ADDITIONAL

The Proplight is available in two colour temperatures: 2000K or 2700K.

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

18

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

CRI

80

LIGHT OUTPUT

499 lm

Dimmer

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.

DIMMER TYPE

Mains dimmable (trailing edge / reverse phase)

LOAD TYPE

Capacitive load (C-Type)
