





Nenúfar

Joan Gaspar


marset

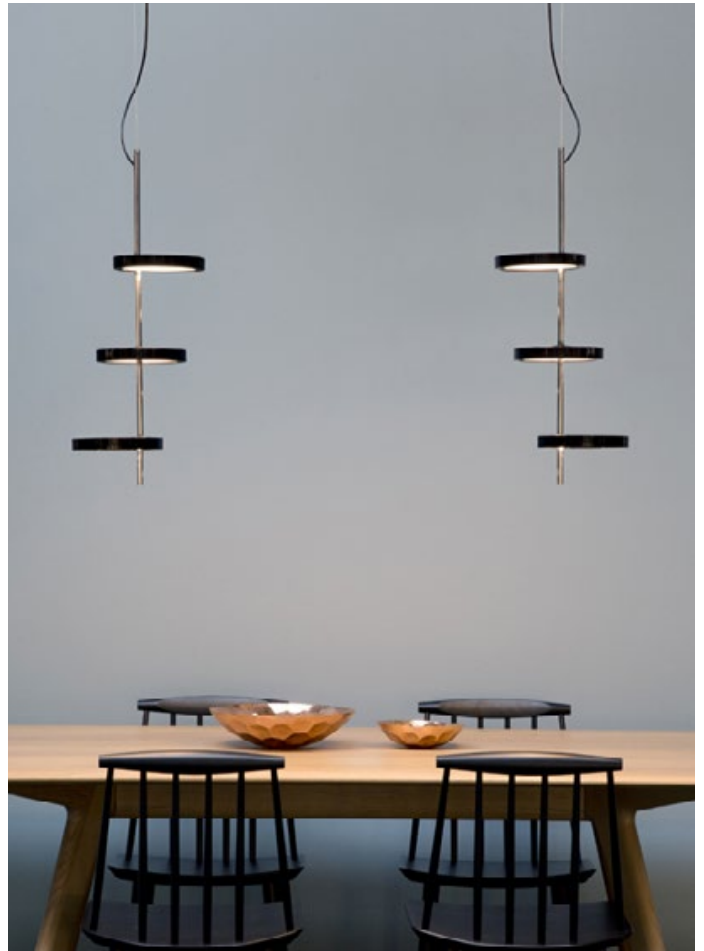


Nenúfar 1

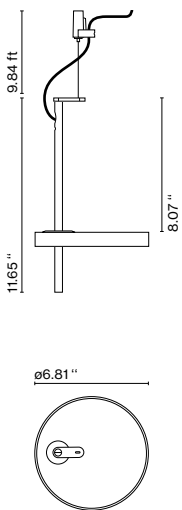

Nenúfar 2

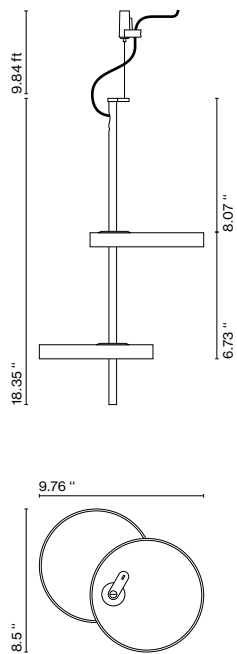

Nenúfar 3

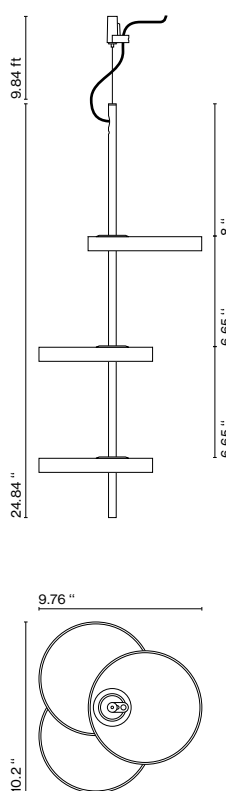

A chromed metal stem supports a system of one, two, or three polycarbonate disks, attached at varying heights and with 120 degrees of separation between. A diffuser with a strip of perimeter LEDs projects the light downwards.

Nenúfar 1

LED 9W 24V 2700K*
Delivered lumens 299lm
(included)

Nenúfar 2

LED 18W 24V 2700K*
Delivered lumens 522lm
(included)

Nenúfar 3

LED 27W 24V 2700K*
Delivered lumens 611lm
(included)

*3000K on request

● Black




Dry locations only

- [Download](#) Assembly Instructions
- [Download](#) Photometric Data
- [Download](#) 2D
- [Download](#) 3D


For mounted canopy installation

When the project requires a combination of different Nenúfars, you will have to take into account the total power in watts, the power of the driver, and the wire entry points of the canopy. The total wattage of the selected Nenúfar elements cannot exceed the max wattage of the canopy's driver. Therefore, you must choose your canopy/driver by the power required. Finally, the number of Nenúfars installed in a single canopy cannot exceed the number of wire entry points of that canopy.

20W Canopy




30W Canopy




40W Hi-Lume Digital / Hi-Lume 3-Wire Canopy




60W Canopy



100W Canopy



100W 0-10V Canopy



Power

Nenúfar 1	9W
Nenúfar 2	18W
Nenúfar 3	27W

Wire entry points

20W Canopy	2
30W Canopy	3
40W / 60W Canopy	4
100W Canopy	5

The Nenúfar system allows one to regulate the light (Hi-Lume 3 Wire, Hi-Lume Digital or 0-10V) at 120-277V



**all versions except 100W 0-10V Canopy*


Black electrical cord

A fixture that seems to float on air, the Nenúfar takes its name and its delicate shape from the water lily.


Nenúfar Pre-sets

The Nenúfar system comes in groups of 5, 7 or 9 units to ease installation.


Pre-set 5A

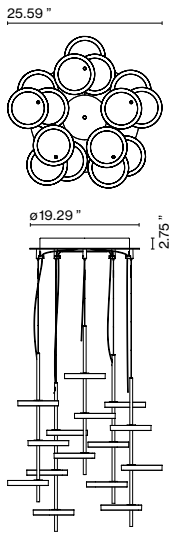


Pre-set 5B

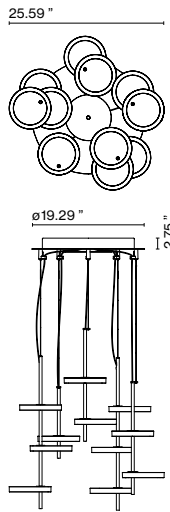


Pre-set 7A

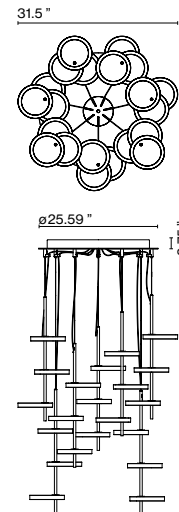


Pre-set 7B

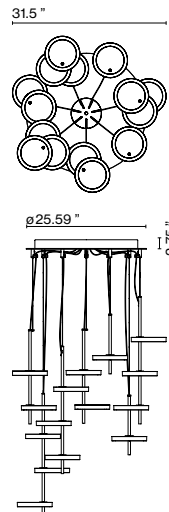

Pre-set 9A

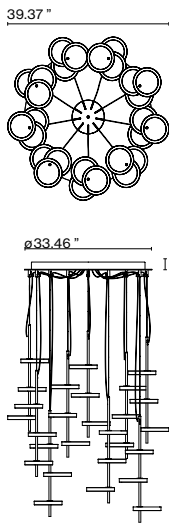

Pre-set 9B

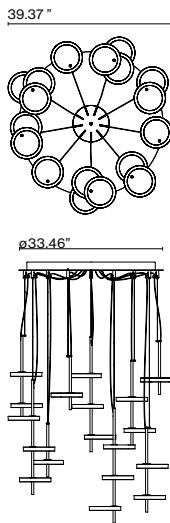

Nenúfar Pre-set 5A

5 x Nenúfar 3 + Canopy (160W)
(driver incl.)

Nenúfar Pre-set 5B

1 x Nenúfar 1, 2 x Nenúfar 2, 2 x Nenúfar 3 + Canopy (160W)
(driver incl.)

Nenúfar Pre-set 7A

7 x Nenúfar 3 + Canopy (220W)
(driver incl.)

Nenúfar Pre-set 7B

2 x Nenúfar 1, 2 x Nenúfar 2, 3 x Nenúfar 3 + Canopy (220W)
(driver incl.)

Nenúfar Pre-set 9A

9 x Nenúfar 3 + Canopy (300W)
(driver incl.)

Nenúfar Pre-set 9B

3 x Nenúfar 1, 3 x Nenúfar 2, 3 x Nenúfar 3 + Canopy (300W)
(driver incl.)

● Black

WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Watch the video marsetusa@marset.com



cULus ** Dry locations only
** Only Hi-lume 3-Wire and Hi-lume Digital.

dimmable •
* Hi-lume 3-Wire or Hi-lume Digital. 0-10V on request.