





The sizes are expressed in millimeters / inches.

DESIGN MICHELE GROPPI - 2022  
WALL LAMP - METAL - MIRROR


REFLEX

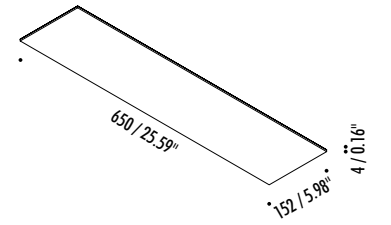


1A0850403.27.40	STANDARD - 2700K - ENDLESS	48 V DC - 23 W LED
1A0850403.30.40	STANDARD - 3000K - ENDLESS	2700K - 2158 lm - CRI > 90 / 3000K - 2320 lm - CRI > 90
		MIRROR TOP (DOWN) WITH BLACK BACK SIDE (UP)
		COMPULSORY ENDLESS POWER SUPPLY KIT NOT INCLUDED

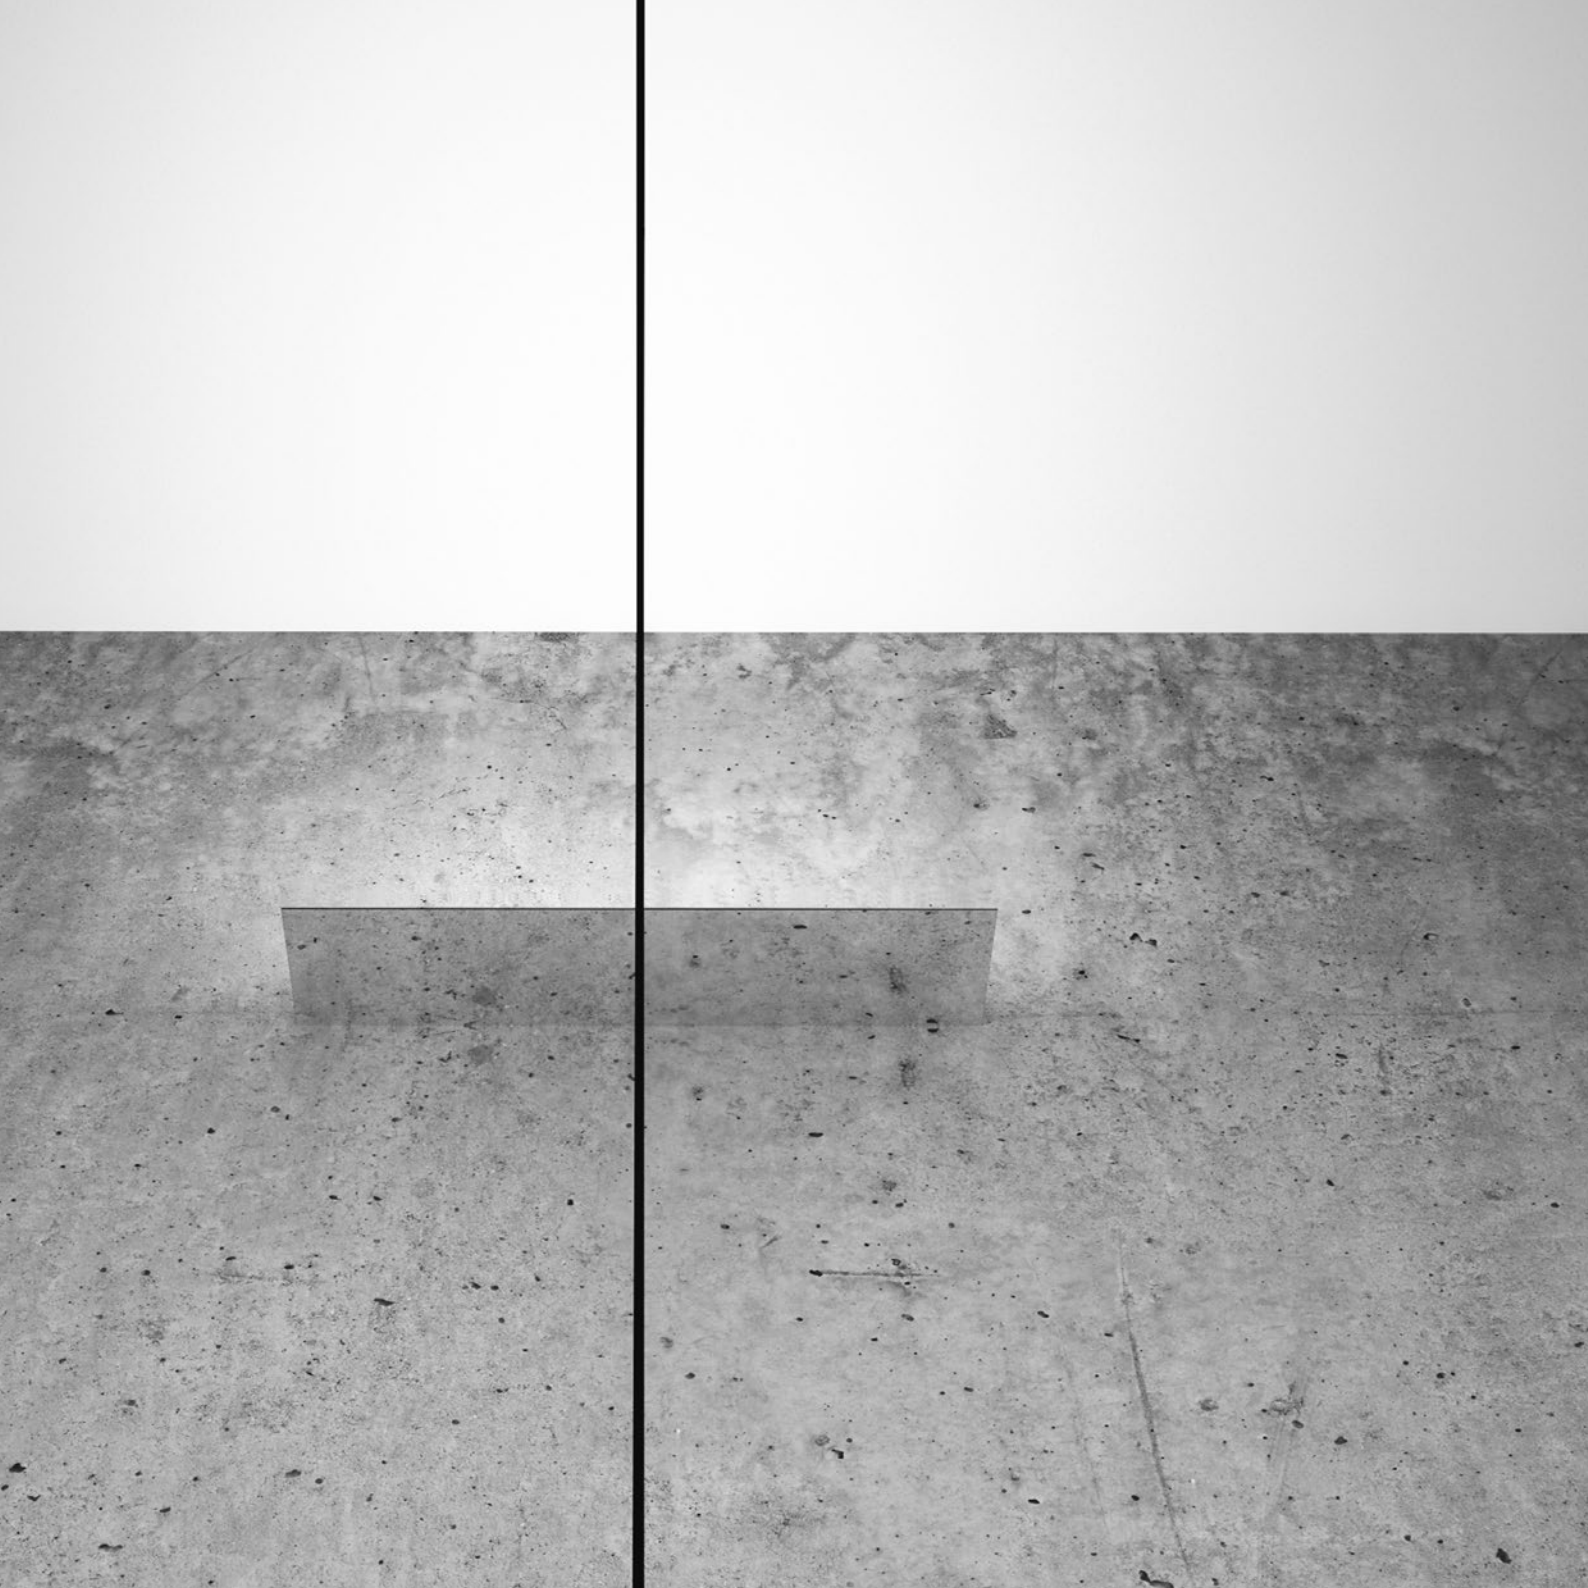


POWER SUPPLY KIT WITH PLUG

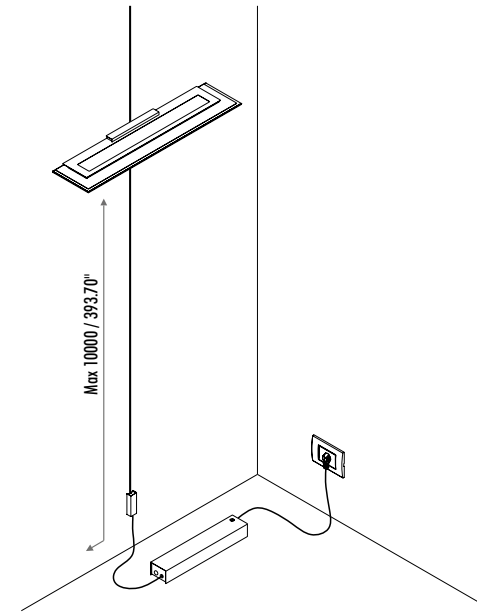


WALL AND CEILING ROSE KIT

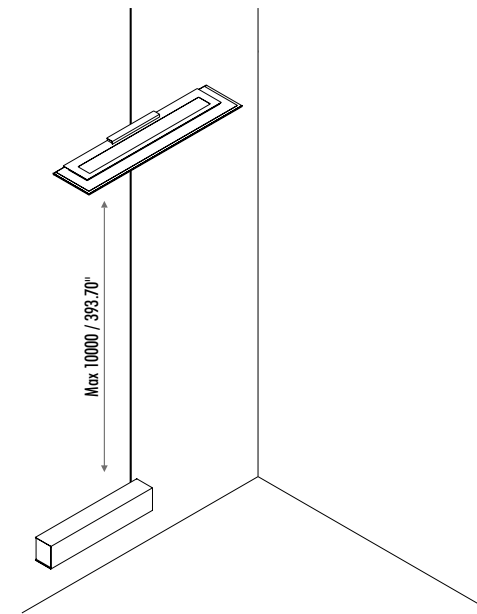


REMOTE POWER SUPPLY KIT

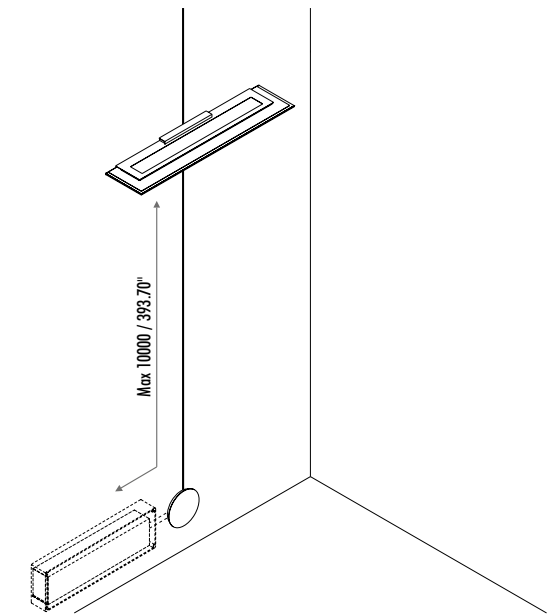



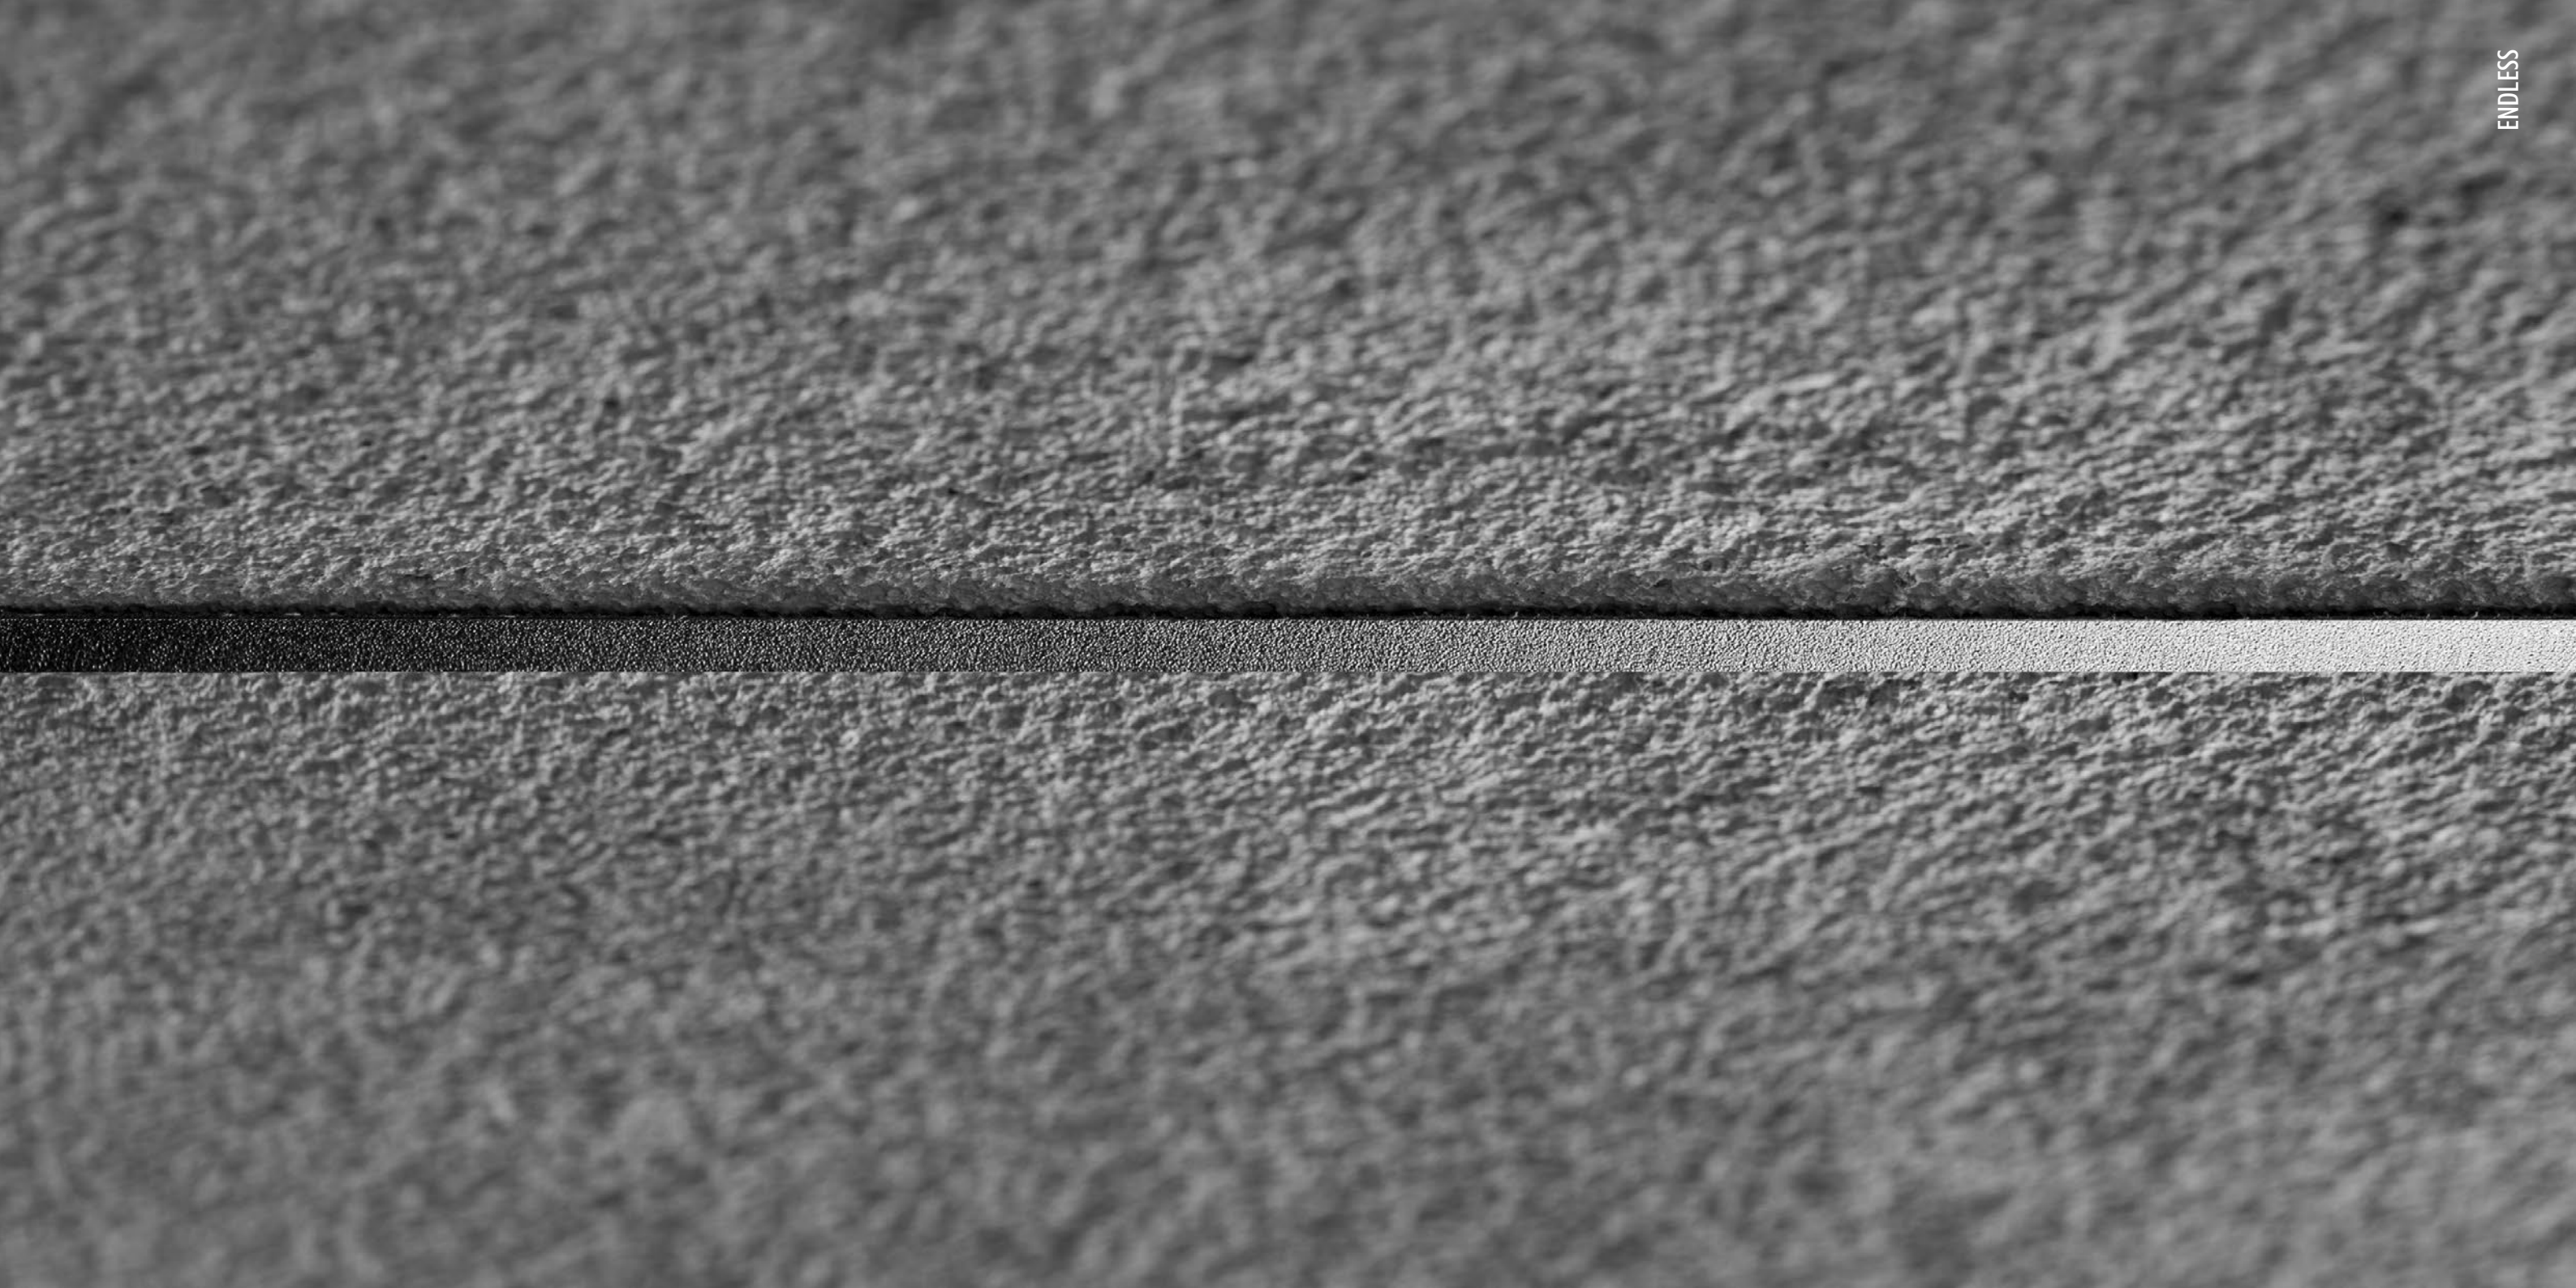

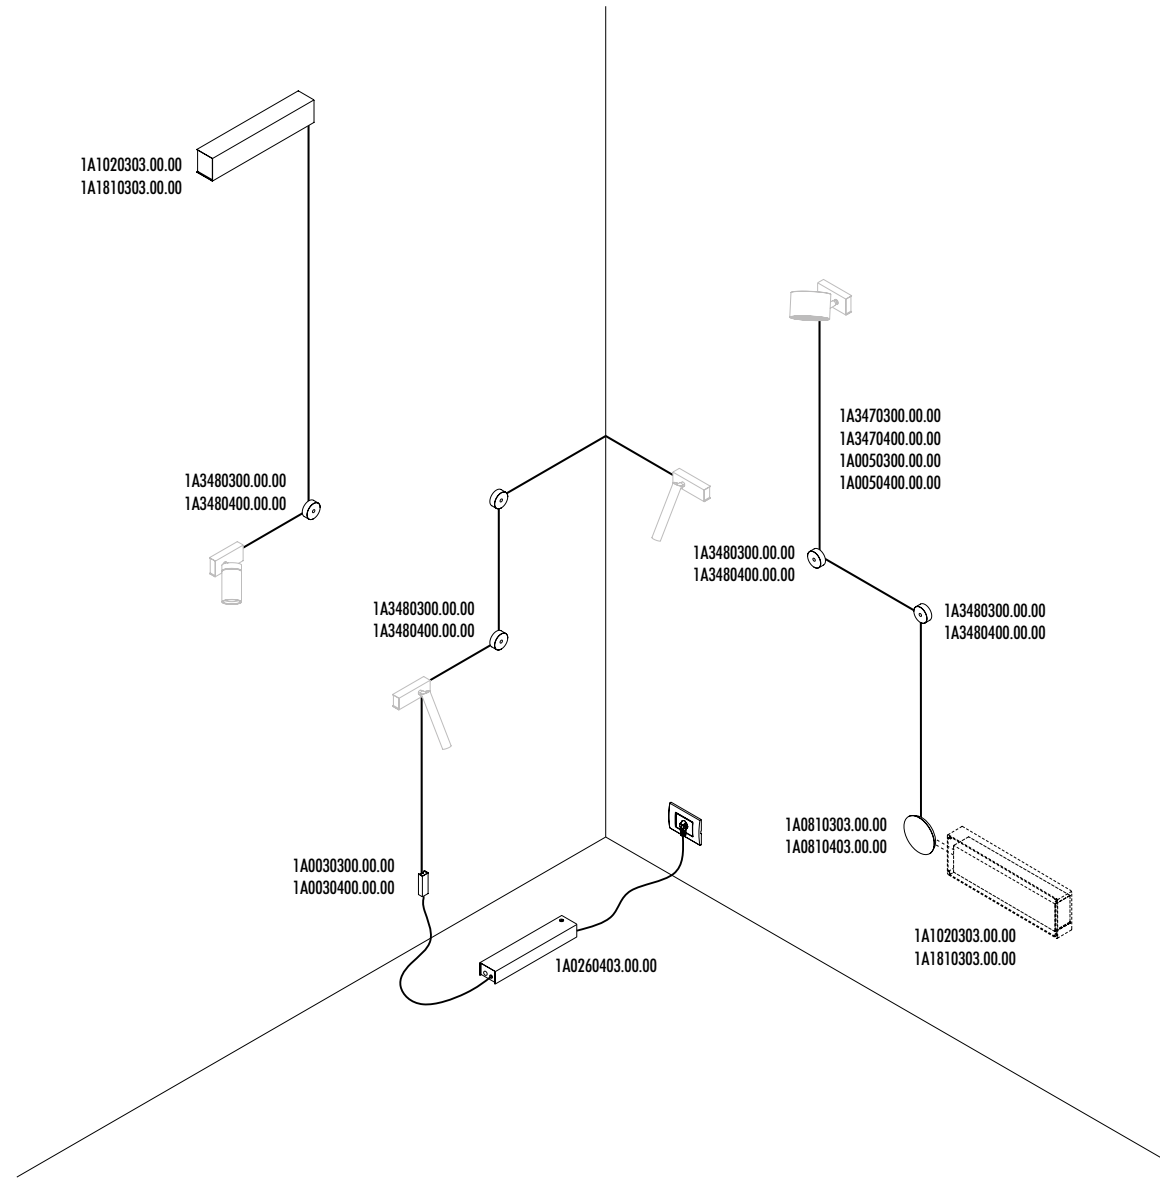

The sizes are expressed in millimeters / inches.

1A3470300.00.00	MATT WHITE - 5 m	ENDLESS - MAX 150 W - MAX 48 V DC - MAX 4 A	
1A3470400.00.00	MATT BLACK - 5 m		
1A0050300.00.00	MATT WHITE - 10 m		
1A0050400.00.00	MATT BLACK - 10 m		


1A0370000.00.00	STANDARD	FIXING ROUGH WALLS KIT - 2,5 m	
-----------------	----------	--------------------------------	--

1A3480300.00.00	MATT WHITE	TERMINAL BOX WITH 2 TERMINALS INCLUDED	
1A3480400.00.00	MATT BLACK		


1A0030300.00.00	MATT WHITE	POWER BASE FOR INSTALLATION WITH PLUG KIT	
1A0030400.00.00	MATT BLACK		

1A0810303.00.00	MATT WHITE	POWER BASE FOR INSTALLATION WITH REMOTE KIT	
1A0810403.00.00	MATT BLACK		


1A3490000.00.00	STANDARD	TERMINALS - 2 PIECES	
-----------------	----------	----------------------	--

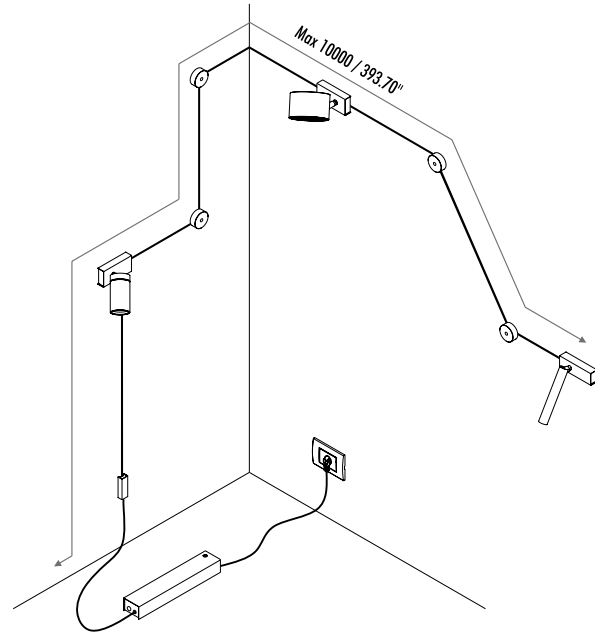

WALL AND CEILING ROSE KIT

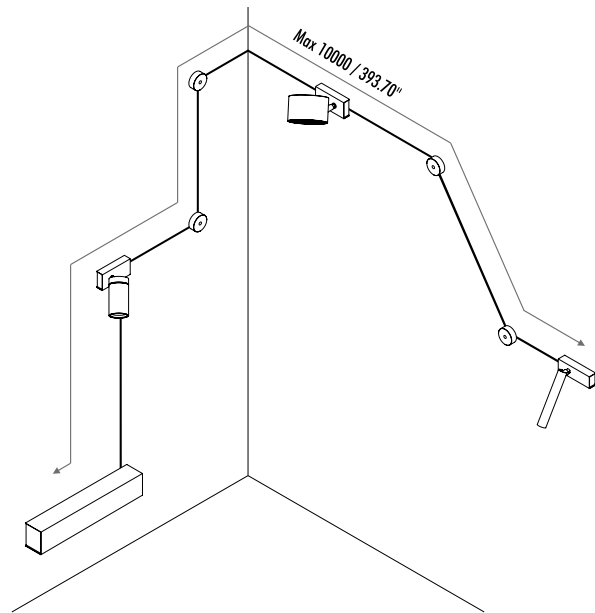

REMOTE POWER SUPPLY KIT

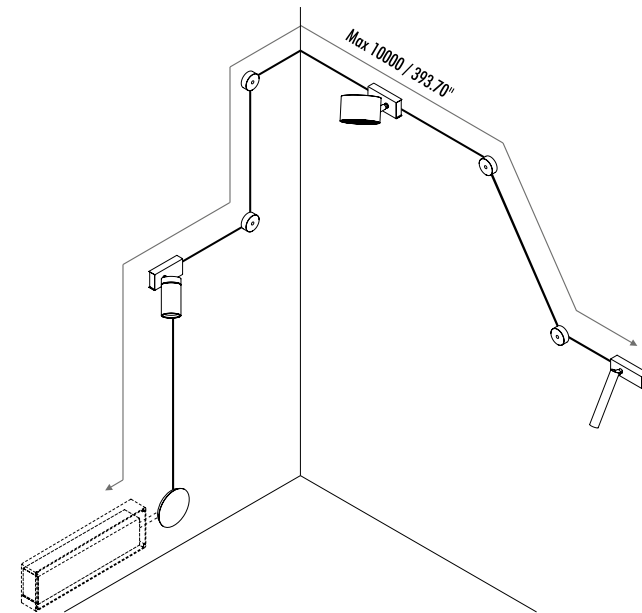

The sizes are expressed in millimeters / inches.

COMPULSORY POWER SUPPLY KIT FOR ENDLESS ON/OFF SYSTEM AND CASAMBI

1A0260303.00.00	MATT WHITE - ON/OFF	POWER SUPPLY KIT WITH PLUG INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W	
1A0260403.00.00	MATT BLACK - ON/OFF		

1A1020303.00.00	MATT WHITE - ON/OFF	WALL - CEILING ROSE - REMOTE KIT INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W - IP20	
1A1020403.00.00	MATT BLACK - ON/OFF		

COMPULSORY POWER SUPPLY KIT FOR ENDLESS DIMMABLE SYSTEM

1A1800303.00.06	MATT WHITE	POWER SUPPLY KIT WITH PLUG - DIMMER INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W	
1A1800403.00.06	MATT BLACK		

1A1810303.00.07	MATT WHITE - DIM	WALL - CEILING ROSE - REMOTE KIT INPUT 120 V - 60 Hz - OUTPUT 48 V DC - 90 W - IP20 DALI - PUSH - 0/1-10 V DIMMABLE	
1A1810403.00.07	MATT BLACK - DIM		



Light is free

POWER KIT:


1A0260403.00.00	POWER SUPPLY KIT WITH PLUG - 48 V - NOT DIMMABLE - MATT BLACK	90	MAX 1,875
1A1020303.00.00	WALL CEILING ROSE - REMOTE KIT - 48 V - NOT DIMMABLE - MATT WHITE	90	MAX 1,875
1A1800403.00.06	POWER SUPPLY KIT WITH PLUG - 48 V - DIMMABLE	90	MAX 1,875
1A1810303.00.07	WALL CEILING ROSE - REMOTE KIT - 48 V - DALI - PUSH - 0/1-10 V DIMMABLE	90	MAX 1,875

ELEMENTS:


		WATTAGE	AMPERE (A)
1A1080303.00.40	SPOT - MATT WHITE - ENDLESS	13	0,34
1A1080403.00.40	SPOT - MATT BLACK - ENDLESS	13	0,34
1A1080303.00.41	SPOT - MATT WHITE - ENDLESS - CASAMBI	15,5	0,4
1A1080403.00.41	SPOT - MATT BLACK - ENDLESS - CASAMBI	15,5	0,4
1A2340303.27.40	DOT P - MATT WHITE - 3000K - ENDLESS	13	0,34
1A2340303.30.40	DOT P - MATT WHITE - 2700K - ENDLESS	13	0,34
1A2340403.27.40	DOT P - MATT BLACK - 3000K - ENDLESS	13	0,34
1A2340403.30.40	DOT P - MATT BLACK - 2700K - ENDLESS	13	0,34
1A2340303.27.41	DOT P - MATT WHITE - 3000K - ENDLESS - CASAMBI	15,5	0,4
1A2340303.30.41	DOT P - MATT WHITE - 2700K - ENDLESS - CASAMBI	15,5	0,4
1A2340403.27.41	DOT P - MATT BLACK - 3000K - ENDLESS - CASAMBI	15,5	0,4
1A2340403.30.41	DOT P - MATT BLACK - 2700K - ENDLESS - CASAMBI	15,5	0,4
1A2280303.27.40	MIRA - MATT WHITE - 3000K - ENDLESS	6	0,16
1A2280303.30.40	MIRA - MATT WHITE - 2700K - ENDLESS	6	0,16
1A2280403.27.40	MIRA - MATT BLACK - 3000K - ENDLESS	6	0,16
1A2280403.30.40	MIRA - MATT BLACK - 2700K - ENDLESS	6	0,16
1A2280303.27.41	MIRA - MATT WHITE - 3000K - ENDLESS - CASAMBI	8,5	0,22
1A2280303.30.41	MIRA - MATT WHITE - 2700K - ENDLESS - CASAMBI	8,5	0,22
1A2280403.27.41	MIRA - MATT BLACK - 3000K - ENDLESS - CASAMBI	8,5	0,22
1A2280403.30.41	MIRA - MATT BLACK - 2700K - ENDLESS - CASAMBI	8,5	0,22
1A2960303.30.40	MISS - MATT WHITE - 3000K - ENDLESS	5,5	0,14
1A2960303.27.40	MISS - MATT WHITE - 2700K - ENDLESS	5,5	0,14
1A2960403.30.40	MISS - MATT BLACK - 3000K - ENDLESS	5,5	0,14
1A2960403.27.40	MISS - MATT BLACK - 2700K - ENDLESS	5,5	0,14
1A2960803.30.40	MISS - BRUSHED BRASS - 3000K - ENDLESS	5,5	0,14
1A2960803.27.40	MISS - BRUSHED BRASS - 2700K - ENDLESS	5,5	0,14
1A2962603.30.40	MISS - MATT TOTAL BLACK - 3000K - ENDLESS	5,5	0,14
1A2962603.27.40	MISS - MATT TOTAL BLACK - 2700K - ENDLESS	5,5	0,14
1A2980303.30.40	CATHODE - MATT WHITE - 2700K	5,5	0,14
1A2980303.27.40	CATHODE - MATT WHITE - 3000K	5,5	0,14
1A2980803.30.40	CATHODE - BRUSHED BRASS - 2700K	5,5	0,14
1A2980803.27.40	CATHODE - BRUSHED BRASS - 3000K	5,5	0,14
1A0850403.27.40	REFLEX - 2700K - ENDLESS	23	0,57
1A0850403.30.40	REFLEX - 3000K - ENDLESS	23	0,57




MIRA ENDLESS




DOT P ENDLESS



SPOT ENDLESS




REFLEX



MISS ENDLESS




CATHODE ENDLESS




LAYOUT EXAMPLES

48 V POWER SUPPLY KIT: ABSORPTION MAX 1,875 A / ENDLESS: MAX 10 METERS LENGHT FROM POWER SUPPLY KIT



2	MIRA	2 x 0,16 A
1	SPOT	0,34 A
		<hr/>
TOT		0,66 A

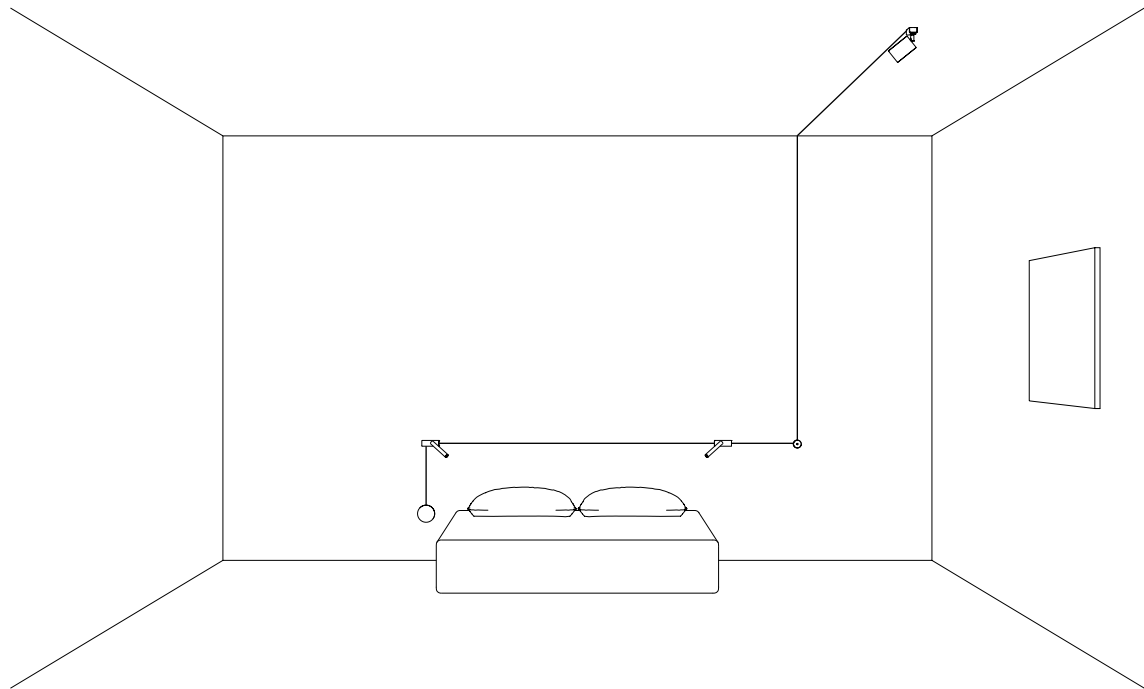

LAYOUT EXAMPLES

48 V POWER SUPPLY KIT: ABSORPTION MAX 1,875 A / ENDLESS: MAX 10 METERS LENGHT FROM POWER SUPPLY KIT

1	MISS	0,14 A
1	REFLEX	0,57 A
		<hr/>
TOT		0,71 A

